


ALTO 1 - 2-piece-set - Submicron assembly with regulator (gauge included) and wall bracket



<p><u>BSPF female thread</u> G 1/4</p>	<p><u>Flow rate (l/min at 6 bar ΔP : 0.3bar)</u> 250</p>	<p><u>Max operating pressure (bar)</u> 12</p>	<p><u>Filtration (μm)</u> 5 and 0.01</p>
<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>	

Description				
Reference	BSPF female thread	Flow rate (l/min at 6 bar ΔP : 0.3bar)	Max operating pressure (bar)	Filtration (μm)
TB CSM1	G 1/4	250	12	5 and 0.01

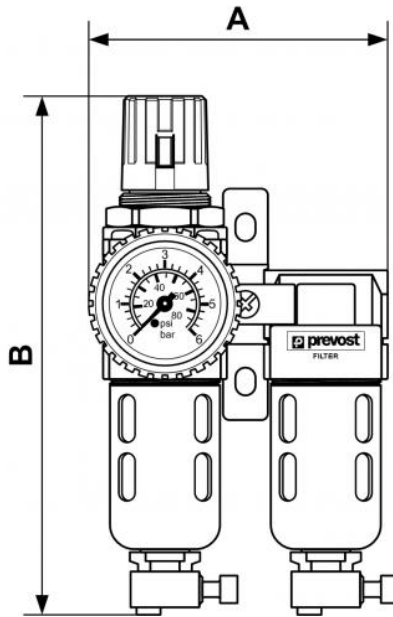

Dimensions

Reference	A mm	B mm
TB CSM1	92	170