


# ALTO 1 - 2-piece-set - Submicron assembly with regulator (gauge included) and wall bracket



<p><b><u>BSPF female thread</u></b> G 1/4</p>	<p><b><u>Flow rate (l/min at 6 bar ΔP : 0.3bar)</u></b> 250</p>	<p><b><u>Max operating pressure (bar)</u></b> 12</p>	<p><b><u>Filtration (µm)</u></b> 5 and 0.01</p>
<p><b><u>Temperature</u></b> +5°C to +50 °C</p>	<p><b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><b><u>Equipped with</u></b> Manual drain</p>	

Description				
Reference	BSPF female thread	Flow rate (l/min at 6 bar ΔP : 0.3bar)	Max operating pressure (bar)	Filtration (µm)
<b>TB CSM1</b>	G 1/4	250	12	5 and 0.01

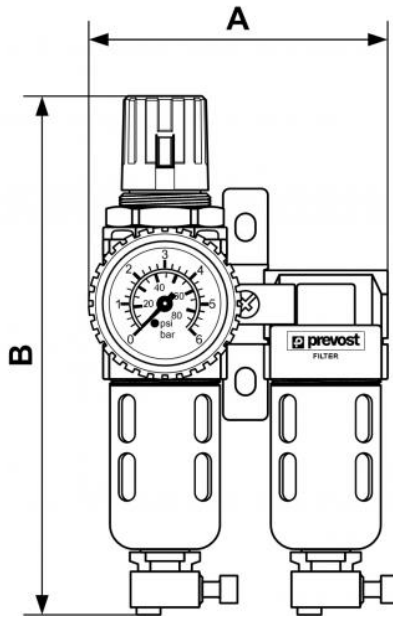

### Dimensions

Reference	A mm	B mm
<b>TB CSM1</b>	92	170