

ALTO 1 - Filter-Regulator (gauge included) with wall bracket and quick connections



BSPP female thread

G 1/4

Temperature

+5°C to +50 °C

Flow rate (l/min at 7 bar ΔP

1bar) = 550

Construction

Body : Aluminium Polycarbonate bowl with metallic protection Max operating pressure (bar) 10


Equipped with

Filtration (µm)

25

Description					
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP	Max operating pressure (bar)	Filtration (µm)	
TM PSM1	G 1/4	1bar) = 550	10	25	



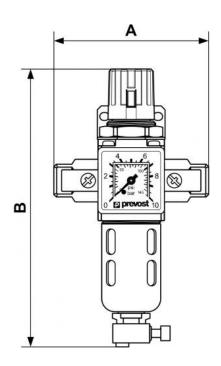

Dimensions					
Reference	A mm	B mm			
TM PSM1	94	170			