


Female thread coupler



<p><u>BSPP female thread</u> G 1/4</p>	<p><u>BSPT female thread</u> -</p>	<p><u>Profile</u> Asian</p>	<p><u>Technology</u> Safety (avoid hose whip)</p>
<p><u>Operating pressure</u> 2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u> 1966 l/min ($\Delta P = 0,6$ bar)</p>	<p><u>ID Passage</u> 8 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>
<p><u>Construction</u> Composite body</p>	<p><u>Highlight</u> Non scratch</p>		

Description		
Reference	BSPP female thread	BSPT female thread
OSG 081101	G 1/4	-
OSG 081102	G 3/8	-
OSG 081103	G 1/2	-
OSG 081111	-	R 1/4

Reference	BSPP female thread	BSPT female thread
OSG 081112	-	R 3/8
OSG 081113	-	R 1/2

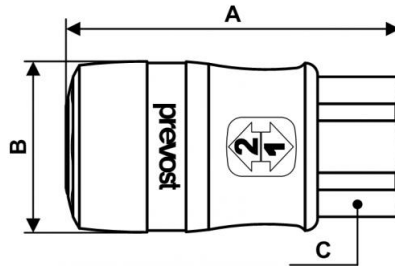

Dimensions

Reference	A mm	B mm	C mm
OSG 081101	54	33	27
OSG 081102	55	33	27
OSG 081103	60	33	27
OSG 081111	54	33	27
OSG 081112	55	33	27
OSG 081113	60	33	27