

Female thread coupler



BSPP female thread

G 1/4

BSPT female thread

-

Profile

Asian

Technology

Safety (avoid hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

1966 l/min ($\Delta P = 0,6$ bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction

Composite body


Highlight

Non scratch

Description

Reference	BSPP female thread	BSPT female thread
OSG 081101	G 1/4	-
OSG 081102	G 3/8	-
OSG 081103	G 1/2	-
OSG 081111	-	R 1/4

Reference	BSPP female thread	BSPT female thread
OSG 081112	-	R 3/8
OSG 081113	-	R 1/2

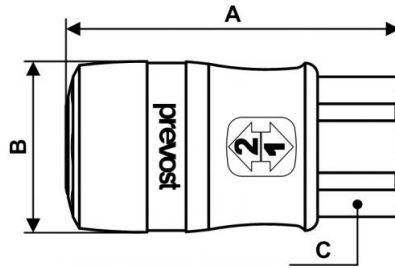

Dimensions

Reference	A mm	B mm	C mm
OSG 081101	54	33	27
OSG 081102	55	33	27
OSG 081103	60	33	27
OSG 081111	54	33	27
OSG 081112	55	33	27
OSG 081113	60	33	27