


## Socket extender - Smooth version - Threading to be cut: R 1/4 or NPT 1/4



<u>Length (mm)</u> 100	<u>Max operating pressure</u> 10 bar	<u>Flow rate</u> 30 l/min ( $\Delta P = 0,5\text{bar}$ )	<u>ID Passage</u> 8 mm
<u>Temperature</u> -15°C to +90°C	<u>Construction</u> Body: nickel-plated brass		

Description	
Reference	Length (mm)
CPI 081100L14	100
CPI 081150L14	150

Reference	Length (mm)
<b>CPI 081200L14</b>	200

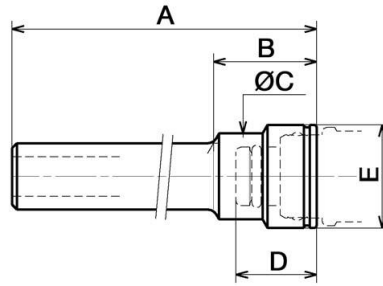

### Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
<b>CPI 081100L14</b>	100	21	17.5	16.4	21
<b>CPI 081150L14</b>	150	21	17.5	16.4	21
<b>CPI 081200L14</b>	200	21	17.5	16.4	21