


Socket extender - Smooth version - Threading to be cut: R 1/4 or NPT 1/4



| | | | |
|--------------------------------------|--|---|---------------------------|
| <u>Length (mm)</u> 100 | <u>Max operating pressure</u> 10 bar | <u>Flow rate</u> 30 l/min ($\Delta P = 0,5\text{bar}$) | <u>ID Passage</u> 8 mm |
| <u>Temperature</u> -15°C to +90°C | <u>Construction</u> Body: nickel-plated brass | | |

| Description | |
|---------------|-------------|
| Reference | Length (mm) |
| CPI 081100L14 | 100 |
| CPI 081150L14 | 150 |

| Reference | Length (mm) |
|----------------------|-------------|
| CPI 081200L14 | 200 |

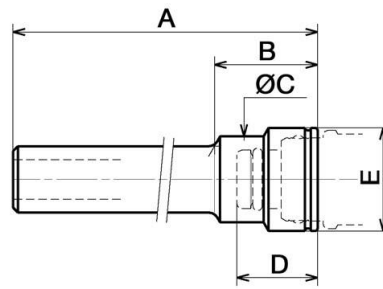

Dimensions

| Reference | A mm | B mm | C mm | D mm | E mm |
|--------------------------|------|------|------|------|------|
| CPI 081100L14 | 100 | 21 | 17.5 | 16.4 | 21 |
| CPI 081150L14 | 150 | 21 | 17.5 | 16.4 | 21 |
| CPI 081200L14 | 200 | 21 | 17.5 | 16.4 | 21 |