


ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and diverter block



<u>BSPP female thread</u> G 1/4	<u>Flow rate (l/min at 7 bar ΔP)</u> 1 bar) = 500	<u>Max operating pressure (bar)</u> 10	<u>Filtration (µm)</u> 25
<u>Temperature</u> +5°C to +50 °C	<u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection	<u>Equipped with</u> Manual drain	

Description				
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (µm)
TB SME1	G 1/4	1 bar) = 500	10	25

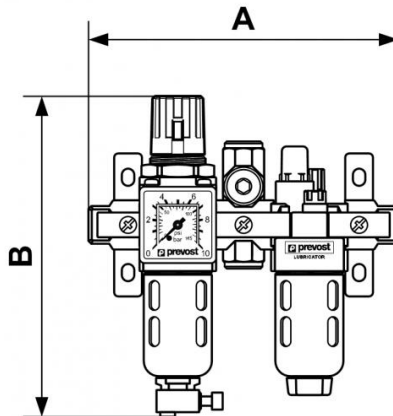

Dimensions

Reference	A mm	B mm
TB SME1	164	169