

## Parallel female thread coupler



**BSPF female thread**

G 1/4

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

2 to 12 bar

**Flow rate at 6 bar**

800 l/min ( $\Delta P = 0,6$  bar)

**ID Passage**

6 mm

**Temperature**

-15°C to +70°C

**Construction**

Composite body

**Highlight**

Anti-static Non scratch

### Description

Reference

BSPF female thread

**ASI 061101**


G 1/4

**ASI 061102**

G 3/8

**ASI 061103**

G 1/2

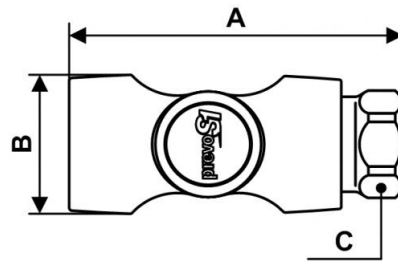

### Dimensions

Reference	A mm	B mm	C mm
<b>ASI 061101</b>	68.6	30	20
<b>ASI 061102</b>	74	30	20
<b>ASI 061103</b>	80.1	30	26