

Parallel female thread coupler



BSPF female thread

G 1/4

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

800 l/min ($\Delta P = 0,6$ bar)

ID Passage

6 mm

Temperature

-15°C to +70°C

Construction


Composite body

Highlight

Anti-static Non scratch

Description

Reference	BSPF female thread
ASI 061101	G 1/4
ASI 061102	G 3/8
ASI 061103	G 1/2

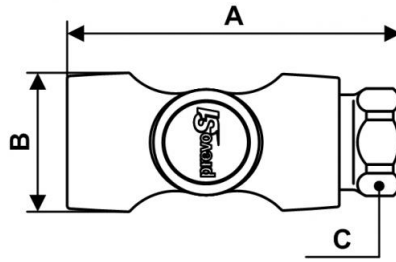

Dimensions

Reference	A mm	B mm	C mm
ASI 061101	68.6	30	20
ASI 061102	74	30	20
ASI 061103	80.1	30	26