

ALTO 4 - Lubricator



BSPF female thread

G 3/4

Flow rate (l/min at 6 bar ΔP : 0,5bar)

7200

Max operating pressure (bar)

12

Temperature

+5°C to +50 °C

Construction

Body : Aluminium


Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPF female thread	Flow rate (l/min at 6 bar ΔP : 0,5bar)	Max operating pressure (bar)
TL 4	G 3/4	7200	12
TL 5	G 1	9000	12

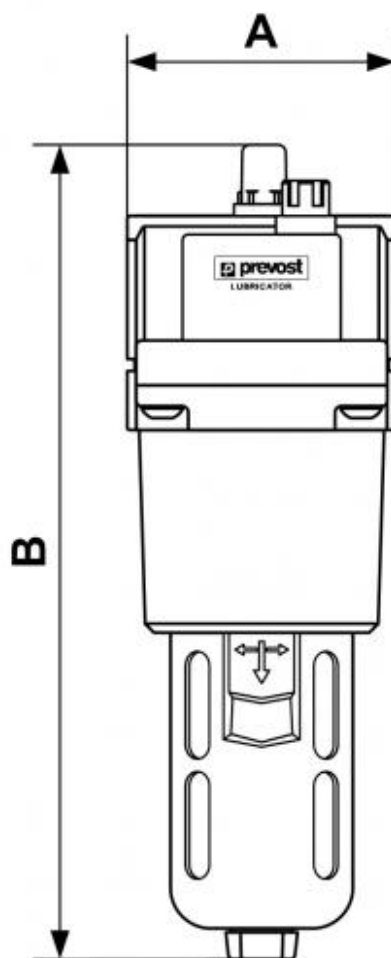

Dimensions

Reference	A mm	B mm
TL 4	90	273
TL 5	90	273