

## ALTO 4 - Lubricator



### BSSPP female thread

G 3/4

### Flow rate (l/min at 6 bar $\Delta P$ : 0,5bar)

7200

### Max operating pressure (bar)

12

### Temperature

+5°C to +50 °C

### Construction

Body : Aluminium


Polycarbonate bowl with metallic protection

### Equipped with

Manual drain

## Description

Reference	BSSPP female thread	Flow rate (l/min at 6 bar $\Delta P$ : 0,5bar)	Max operating pressure (bar)
<b>TL 4</b>	G 3/4	7200	12
<b>TL 5</b>	G 1	9000	12

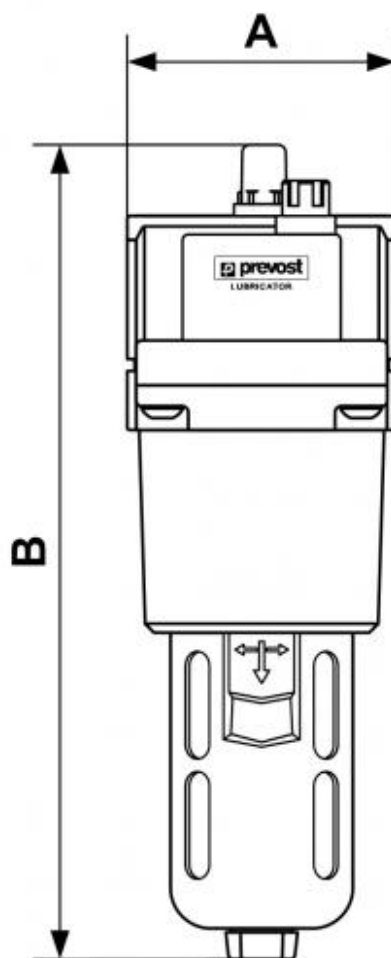

### Dimensions

Reference	A mm	B mm
TL 4	90	273
TL 5	90	273