

## DMO - DGO series - High pressure stainless steel - Hot Water - HP reinforced rubber hose



### ID/OD (mm)

8 x 15

### Length (m)

15

### Outlet

G 3/8 + M22 x 1.5

### Swivel inlet BSPP

female thread

G 3/8

### Weight (kg)

16

### Technology

Pipe locked with ratchet  
stop

### Max operating

pressure

400 bar

### Temperature


-40°C to +150°C

### Equipped with

Fixed bracket

## Description

Reference	ID/OD (mm)	Length (m)	Outlet	Swivel inlet BSPP female thread	Weight (kg)
<b>DMO 0815HPI</b>	8 x 15	15	G 3/8 + M22 x 1.5	G 3/8	16
<b>DGO 0820HPI</b>	8 x 15	20	G 3/8 + M22 x 1.5	G 3/8	21

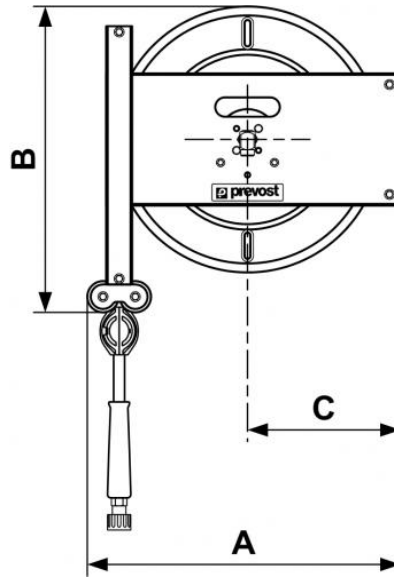

### Dimensions

Reference	A mm	B mm	C mm
<b>DMO 0815HPI</b>	485	475	237
<b>DGO 0820HPI</b>	485	475	237