

## DMO - DGO series - High pressure stainless steel - Hot Water - HP reinforced rubber hose



**ID/OD (mm)**

8 x 15

**Length (m)**

15

**Outlet**

G 3/8 + M22 x 1.5

**Swivel inlet BSPP**

**female thread**

G 3/8

**Weight (kg)**

16

**Technology**

Pipe locked with ratchet  
stop

**Max operating**

**pressure**

400 bar

**Temperature**


-40°C to +150°C

**Equipped with**

Fixed bracket

### Description

Reference	ID/OD (mm)	Length (m)	Outlet	Swivel inlet BSPP female thread	Weight (kg)
<b>DMO 0815HPI</b>	8 x 15	15	G 3/8 + M22 x 1.5	G 3/8	16
<b>DGO 0820HPI</b>	8 x 15	20	G 3/8 + M22 x 1.5	G 3/8	21

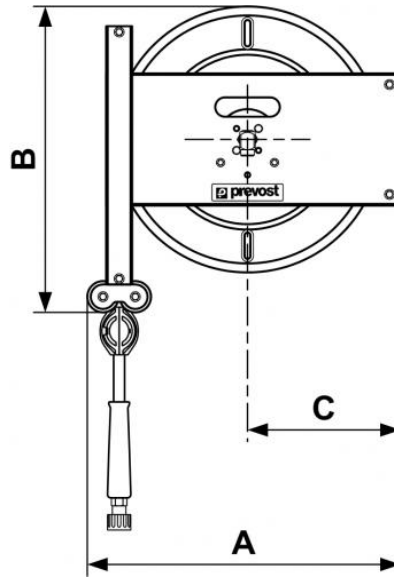

### Dimensions

Reference	A mm	B mm	C mm
<b>DMO 0815HPI</b>	485	475	237
<b>DGO 0820HPI</b>	485	475	237