



# DMOI - DGOI series - 304 Stainless steel with thermoplastic hose - Food grade

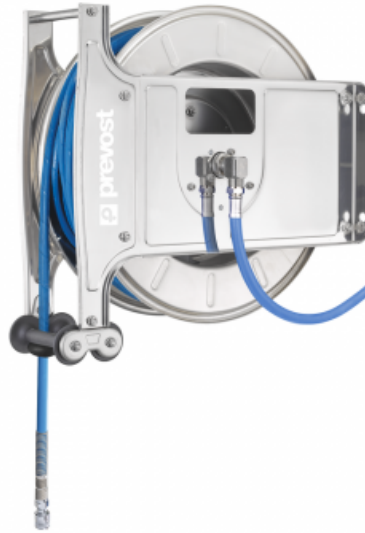

<p><b><u>ID/OD (mm)</u></b> 16 x 24</p>	<p><b><u>Length (m)</u></b> 10</p>	<p><b><u>Coupler</u></b> ELS 09</p>	<p><b><u>Swivel inlet BSPP male thread</u></b> G 1/2</p>
<p><b><u>Weight (kg)</u></b> 20</p>	<p><b><u>Technology</u></b> Pipe locked with ratchet stop</p>	<p><b><u>Max operating pressure</u></b> 10 bar</p>	<p><b><u>Temperature</u></b> -15°C to +60°C</p>
<p><b><u>Construction</u></b> AISI 304 stainless steel case</p>	<p><b><u>Connection</u></b> 1 m of inlet supply hose</p>	<p><b><u>Equipped with</u></b> Fixed bracket</p>	

## Description

Reference	ID/OD (mm)	Length (m)	Coupler	Swivel inlet BSPP male thread	Weight (kg)
<b>DMOI 1610LS</b>	16 x 24	10	ELS 09	G 1/2	20
<b>DGOI 1615LS</b>	16 x 24	15	ELS 09	G 1/2	25

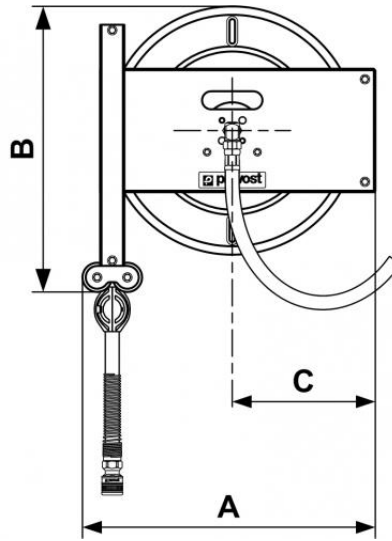

### Dimensions

Reference	A mm	B mm	C mm
<b>DMOI 1610LS</b>	485	475	237
<b>DGOI 1615LS</b>	485	475	237