

Unidirectional regulator - Parallel male thread/Tube - RPL TG



BSPB male thread

G 1/8

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature

0°C to + 60°C


Construction

Polymer and nickel-plated
brass

Description

Reference	BSPB male thread	For tube OD (mm)
RPL TG0400	G 1/8	4
RPL TG0600	G 1/8	6
RPL TG0601	G 1/4	6
RPL TG0800	G 1/8	8
RPL TG0801	G 1/4	8
RPL TG0802	G 3/8	8

Reference	BSPB male thread	For tube OD (mm)
RPL TG1001	G 1/4	10
RPL TG1002	G 3/8	10
RPL TG1003	G 1/2	10
RPL TG1201	G 1/4	12
RPL TG1202	G 3/8	12
RPL TG1203	G 1/2	12

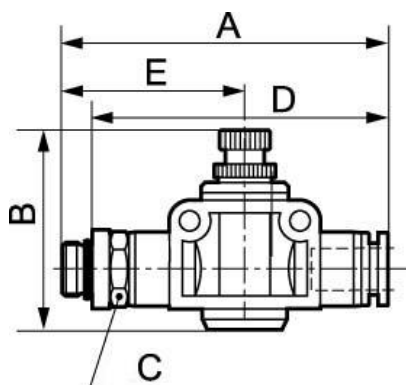

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RPL TG0400	54.1	30	12	48.6	30.1
RPL TG0600	55.5	43	12	50	31
RPL TG0601	56	43	14	50	31.5
RPL TG0800	61.8	47	14	56.3	34.3
RPL TG0801	61.8	47	14	55.8	34.3
RPL TG0802	63.3	47	17	56.8	35.8
RPL TG1001	70.9	54	17	64.9	39.4
RPL TG1002	70.9	54	17	64.4	39.4
RPL TG1003	71.5	54	21	63.5	40
RPL TG1201	81.7	59	19	75.7	44.2
RPL TG1202	81.2	59	19	74.7	43.7
RPL TG1203	82.7	59	21	74.7	45.2