

Parallel female straight adaptor - RPD FG



Metric female thread

M5

For tube OD (mm)

4

Operating pressure

0 to 10 bar

Temperature


0°C to + 60°C

Construction

Polymer and nickel-plated
brass

Description

| Reference | Metric female thread | For tube OD (mm) |
|-------------------|----------------------|------------------|
| RPD FG04M5 | M5 | 4 |
| RPD FG05M5 | M5 | 5 |
| RPD FG06M5 | M5 | 6 |

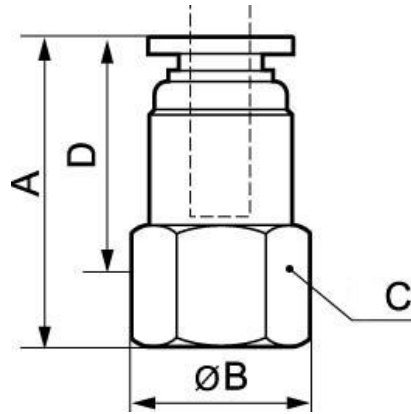

Dimensions

| Reference | A mm | B mm | C mm | D mm |
|-------------------|------|------|------|------|
| RPD FG04M5 | 22 | 14 | 12 | 17 |
| RPD FG05M5 | 23.5 | 16.5 | 14 | 18.5 |
| RPD FG06M5 | 23.5 | 16.5 | 14 | 18.5 |