


ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket, diverter block, and 2 prevoS1 safety quick coupler

1941_TB_SME1ES_montage_PREVOST-800px.tif

<p>Female thread (BSPP) G 1/4</p>	<p>Flow rate (l/min at 7 bar ΔP) 1 bar) = 500</p>	<p>Max operating pressure (bar) 12</p>	<p>Filtration (μm) 25</p>
<p>Temperature +5°C to +50 °C</p>	<p>Construction Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p>Equipped with Manual drain</p>	

Description				
Reference	Female thread (BSPP)	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)
TB SME1ES	G 1/4	1bar) = 500	12	25

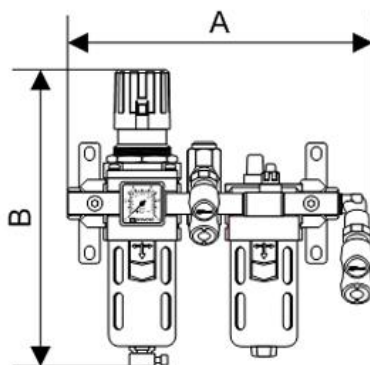

Dimensions

Reference	A mm	B mm
TB SME1ES	195	169