


ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket, diverter block, and 2 prevoS1 safety quick coupler

1911_TB_SME1ES_montage_PREVOST-800px.tif

<p><u>Female thread (BSPP)</u> G 1/4</p>	<p><u>Flow rate (l/min at 7 bar ΔP)</u> 1 bar) = 500</p>	<p><u>Max operating pressure (bar)</u> 12</p>	<p><u>Filtration (μm)</u> 25</p>
<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>	

Description				
Reference	Female thread (BSPP)	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)
TB SME1ES	G 1/4	1bar) = 500	12	25

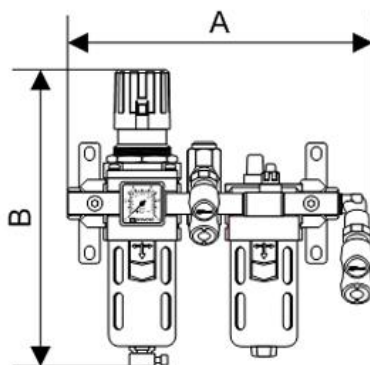

Dimensions

Reference	A mm	B mm
TB SME1ES	195	169