


ALTO 2 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket, diverter block, and 2 prevoS1 safety quick coupler



<u>Inlet BSPP female thread</u> G 3/8	<u>Flow rate (l/min at 7 bar ΔP : 1bar)</u> 1250	<u>Max operating pressure (bar)</u> 12	<u>Filtration (μm)</u> 25
<u>Temperature</u> +5°C to +50 °C	<u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection	<u>Equipped with</u> Manual drain	

Description				
Reference	Inlet BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Max operating pressure (bar)	Filtration (μm)
TB SME2ES	G 3/8	1250	12	25

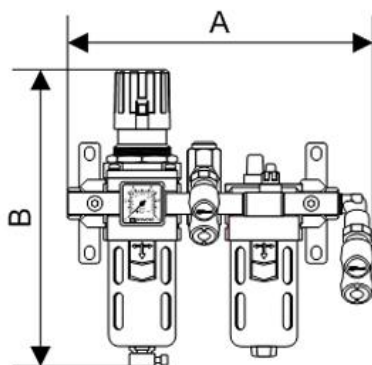

Dimensions

Reference	A mm	B mm
TB SME2ES	233	216