


# ALTO 2 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket, diverter block, and 2 prevoS1 safety quick coupler



<b><u>Inlet BSPP female thread</u></b> G 3/8	<b><u>Flow rate (l/min at 7 bar ΔP : 1bar)</u></b> 1250	<b><u>Max operating pressure (bar)</u></b> 12	<b><u>Filtration (μm)</u></b> 25
<b><u>Temperature</u></b> +5°C to +50 °C	<b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection	<b><u>Equipped with</u></b> Manual drain	

Description				
Reference	Inlet BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Max operating pressure (bar)	Filtration (μm)
<b>TB SME2ES</b>	G 3/8	1250	12	25

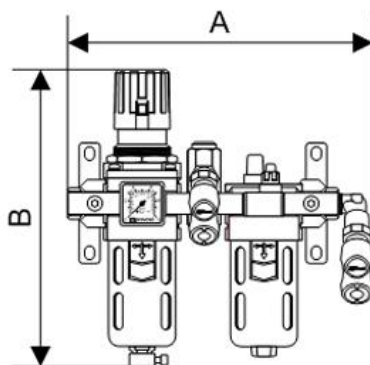

### Dimensions

Reference	A mm	B mm
<b>TB SME2ES</b>	233	216