

## Complete portable kit for 50/60 kg grease drums



### Includes

- pump for 50/60 kg drum -  
tube lenght: 730 mm - cover  
+ sealing diaphragm -  
distribution gun - 6 m rubber  
hose

### Technology

Piston dual action

### Operating pressure

3 to 7 bar

### Outlet pressure

406 bar (air pressure at 7  
bar)

### Flow rate

900 g/min (for air pressure 6  
bar)

### BSPP female thread

Air inlet : G 1/4

### Pressure ratio


58:1

### BSPP male thread

Grease outlet : G 1/4

## Description

Reference	Includes
<b>EPG KR60</b>	- pump for 50/60 kg drum - tube lenght: 730 mm - cover + sealing diaphragm - distribution gun - 6 m rubber hose
<b>EPG KRF60</b>	Complete portable kit for 50/60 kg grease drums with FRL
<b>EPG KRFC60</b>	Complete kit for 50/60 kg grease drums with FRL and transport cart

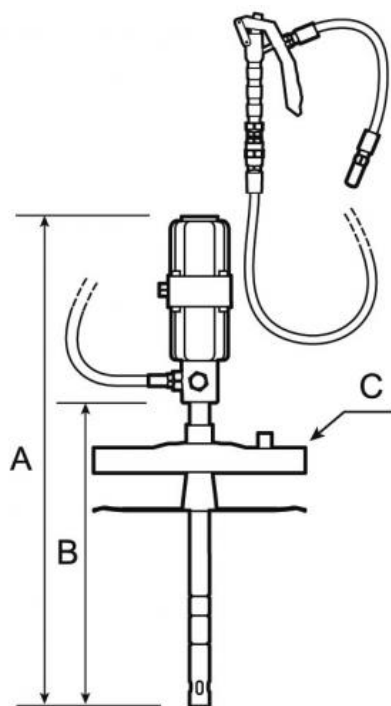

Dimensions			
Reference	A mm	B mm	C mm
<b>EPG KR60</b>	1000	730	340
<b>EPG KRF60</b>	1000	730	340
<b>EPG KRFC60</b>	680	410	280