


# ALTO 3 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket, diverter block, and 2 prevoS1 safety quick release coupler



<p><b><u>Female thread (BSPP)</u></b> G 1/2</p>	<p><b><u>Flow rate (l/min at 7 bar ΔP)</u></b> 1bar) = 1820</p>	<p><b><u>Max operating pressure (bar)</u></b> 12</p>	<p><b><u>Filtration (μm)</u></b> 25</p>
<p><b><u>Equipped with 1 coupling</u></b> ESI 07</p>	<p><b><u>Temperature</u></b> +5°C to +50 °C</p>	<p><b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><b><u>Equipped with</u></b> Manual drain</p>

Description					
Reference	Female thread (BSPP)	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling
<b>TB SME3ES</b>	G 1/2	1bar) = 1820	12	25	ESI 07

Reference	Female thread (BSP)	Flow rate(l/min at 7 bar $\Delta$ P)	Max operating pressure (bar)	Filtration ( $\mu$ m)	Equipped with 1 coupling
<b>TB SME3IS</b>	G 1/2	1bar) = 833	12	25	ISI 06

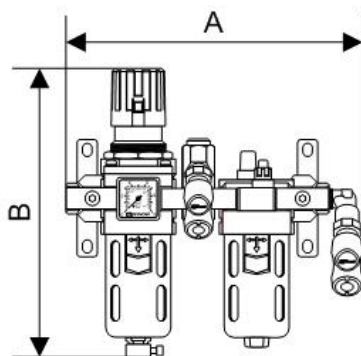

### Dimensions

Reference	A mm	B mm
<b>TB SME3ES</b>	280	277
<b>TB SME3IS</b>	280	277