


## ALTO 3 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket, diverter block, and 2 prevoS1 safety quick release coupler



<b><u>Female thread (BSPP)</u></b> G 1/2	<b><u>Flow rate (l/min at 7 bar <math>\Delta P</math>)</u></b> 1bar) = 1820	<b><u>Max operating pressure (bar)</u></b> 12	<b><u>Filtration (<math>\mu m</math>)</u></b> 25
<b><u>Equipped with 1 coupling</u></b> ESI 07	<b><u>Temperature</u></b> +5°C to +50 °C	<b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection	<b><u>Equipped with</u></b> Manual drain

Description					
Reference	Female thread (BSPP)	Flow rate (l/min at 7 bar $\Delta P$ )	Max operating pressure (bar)	Filtration ( $\mu m$ )	Equipped with 1 coupling
<b>TB SME3ES</b>	G 1/2	1bar) = 1820	12	25	ESI 07

Reference	Female thread (BSPP)	Flow rate(l/min at 7 bar $\Delta$ P	Max operating pressure (bar)	Filtration ( $\mu$ m)	Equipped with 1 coupling
<b>TB SME3IS</b>	G 1/2	1bar) = 833	12	25	ISI 06

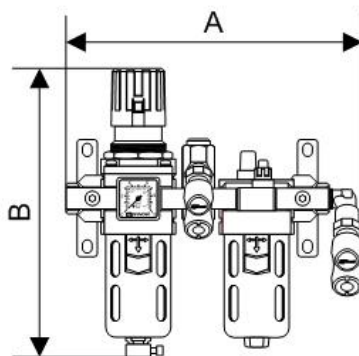

## Dimensions

Reference	A mm	B mm
<b>TB SME3ES</b>	280	277
<b>TB SME3IS</b>	280	277