


Hose tail coupler



<p><u>For hose ID (mm)</u> 6</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u> 833 l/min ($\Delta P = 0,6$ bar)</p>
<p><u>ID Passage</u> 6 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Composite body</p>	<p><u>Highlight</u> Anti-static Non scratch</p>

Description	
Reference	For hose ID (mm)
ISI 061806	6
ISI 061808	8
ISI 061810	10
ISI 061813	13

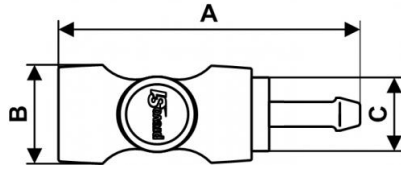

Dimensions

Reference	A mm	B mm	C mm
ISI 061806	83	30	19.4
ISI 061808	83	30	19.4
ISI 061810	83	30	19.4
ISI 061813	88	30	19.4