

Parallel female thread coupler



BSPF female thread

G 1/4

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2028 l/min ($\Delta P = 0,6$ bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction

Composite body

Highlight

Anti-static Non scratch

Description

Reference

BSPF female thread

ISI 081101


G 1/4

ISI 081102

G 3/8

ISI 081103

G 1/2

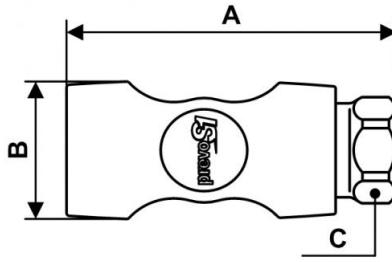

Dimensions

Reference	A mm	B mm	C mm
ISI 081101	82.4	33	23
ISI 081102	82.4	33	23
ISI 081103	89.4	33	26