

## Parallel male thread coupler



**BSPB male thread**

G 1/4

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

2 to 12 bar

**Flow rate at 6 bar**

2028 l/min ( $\Delta P = 0,6$  bar)

**ID Passage**

8 mm

**Temperature**

-15°C to +70°C

**Construction**

Composite body

**Highlight**

Anti-static Non scratch

### Description

Reference

BSPB male thread

**ISI 081151**


G 1/4

**ISI 081152**

G 3/8

**ISI 081153**

G 1/2

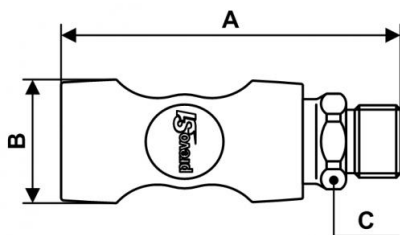

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 081151</b>	90.4	33	23
<b>ISI 081152</b>	91.4	33	23
<b>ISI 081153</b>	93.4	33	26