


## Hose tail coupler



<p><b><u>For hose ID (mm)</u></b></p> <p>8</p>	<p><b><u>Technology</u></b></p> <p>"One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b></p> <p>2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b></p> <p>2028 l/min (<math>\Delta P = 0,6</math> bar)</p>
<p><b><u>ID Passage</u></b></p> <p>8 mm</p>	<p><b><u>Temperature</u></b></p> <p>-15°C to +70°C</p>	<p><b><u>Construction</u></b></p> <p>Composite body</p>	<p><b><u>Highlight</u></b></p> <p>Anti-static Non scratch</p>

Description	
Reference	For hose ID (mm)
<b>ISI 081808</b>	8
<b>ISI 081810</b>	10
<b>ISI 081813</b>	13
<b>ISI 081816</b>	16

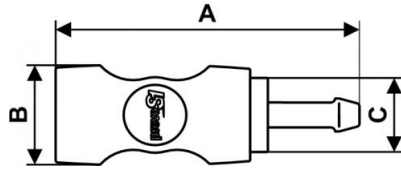

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 081808</b>	96.4	33	22.6
<b>ISI 081810</b>	96.4	33	22.6
<b>ISI 081813</b>	101.4	33	22.6
<b>ISI 081816</b>	101.4	33	22.6