


## Hose tail coupler



<u>For hose ID (mm)</u> 8	<u>Technology</u> Safety (avoid hose whip)	<u>Operating pressure</u> 2 to 16 bar	<u>Flow rate at 6 bar</u> 2120 l/min ( $\Delta P = 0,6$ bar)
<u>ID Passage</u> 8 mm	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Body : Stainless steel	<u>Highlight</u> Anti-static

Description	
Reference	For hose ID (mm)
CSM 081808	8
CSM 081810	10
CSM 081813	13
CSM 081816	16

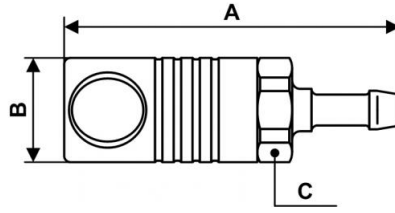

### Dimensions

Reference	A mm	B mm	C mm
<b>CSM 081808</b>	87	27	25
<b>CSM 081810</b>	87	27	25
<b>CSM 081813</b>	92	27	25
<b>CSM 081816</b>	92	27	25