

Thread swivel coupler



BSPF female thread

G 3/8

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2028 l/min ($\Delta P = 0,6$ bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction

Composite body

Highlight

Anti-static Non scratch


Description

Reference

ISI 081102SW

BSPF female thread

G 3/8

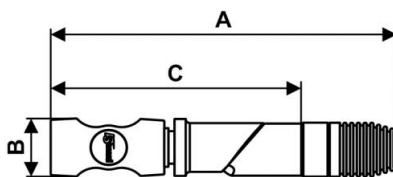

Dimensions

Reference	A mm	B mm	C mm
ISI 081102SW	184	33	137.7