

Tapered male straight stud - RMD MR



BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 15 bar

Temperature

-20°C to +80°C


Construction

Nickel-plated brass

Description

Reference	BSPT male thread	For tube OD (mm)
RMD MR0400	R 1/8	4
RMD MR0600	R 1/8	6
RMD MR0601	R 1/4	6
RMD MR0800	R 1/8	8
RMD MR0801	R 1/4	8
RMD MR0802	R 3/8	8

Reference	BSPT male thread	For tube OD (mm)
RMD MR1001	R 1/4	10
RMD MR1002	R 3/8	10
RMD MR1202	R 3/8	12
RMD MR1203	R 1/2	12

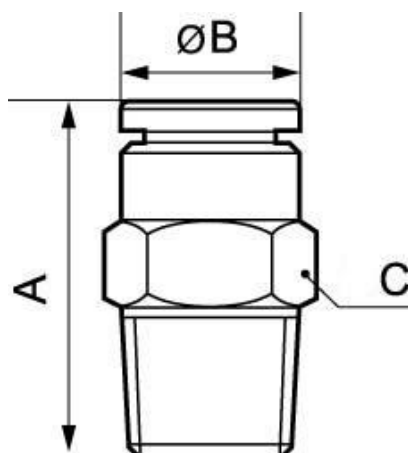

Dimensions			
Reference	A mm	B mm	C mm
RMD MR0400	20.5	9.8	10
RMD MR0600	24.5	11.6	12
RMD MR0601	26	11.6	14
RMD MR0800	28	13.5	14
RMD MR0801	27.5	13.5	14
RMD MR0802	27	13.5	17
RMD MR1001	34.5	15.5	17
RMD MR1002	30.3	15.5	17
RMD MR1202	31.5	17.8	19
RMD MR1203	34	17.8	22