

Swivel tapered male lateral tee piece - RMT AR



BSPT male thread

R 1/8

For tube OD (mm)

4

Operating pressure

0 to 15 bar

Temperature

-20°C to +80°C


Construction

Nickel-plated brass

Description

Reference	BSPT male thread	For tube OD (mm)
RMT AR0400	R 1/8	4
RMT AR0600	R 1/8	6
RMT AR0601	R 1/4	6
RMT AR0800	R 1/8	8
RMT AR0801	R 1/4	8
RMT AR1001	R 1/4	10

Reference	BSPT male thread	For tube OD (mm)
RMT AR1002	R 3/8	10
RMT AR1202	R 3/8	12
RMT AR1203	R 1/2	12

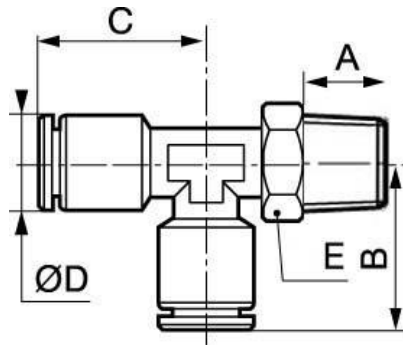

Dimensions

Reference	A mm	B mm	C mm	D mm	E mm
RMT AR0400	8	23	22	10	12
RMT AR0600	8	24	24	11.6	12
RMT AR0601	11	25	26	11.6	16
RMT AR0800	8	27.5	27.5	14.5	12
RMT AR0801	11	30	26	14	16
RMT AR1001	11	30.5	30.5	15.6	16
RMT AR1002	11	30.5	30.5	15.6	19
RMT AR1202	12	35	32	19	19
RMT AR1203	14	34.5	34.5	19	22