

## DGO series - Large - Rubber hose



### ID/OD (mm)

13 x 20

### Length (m)

20

### Coupler

ISI 08

### Flow rate (l/min)

1000

### Swivel inlet (BSPP)

G 1/2 M

### Weight (kg)

27

### Technology

Pipe locked with ratchet  
stop

### Max operating

pressure

12 bar

### Construction

Epoxy-coated steel case

### Connection


1 m of inlet supply hose

### Equipped with

Fixed bracket

## Description

Reference	ID/OD (mm)	Length (m)	Coupler	Flow rate (l/min)	Swivel inlet (BSPF)	Weight (kg)
<b>DGO 1025ES</b>	10 x 17	25	ESI 07	500	G 3/8 F	26
<b>DGO 1320ES</b>	13 x 20	20	ESI 07	1000	G 1/2 M	27
<b>DGO 1610ES</b>	16 x 23	10	ESI 11EB	3000	G 1/2 M	27
<b>DGO 1025IS</b>	10 x 17	25	ISI 06	500	G 3/8 F	26
<b>DGO 1320IS</b>	13 x 20	20	ISI 08	1000	G 1/2 M	27
<b>DGO 1610IS</b>	16 x 23	10	ISI 11EB	3000	G 1/2 M	25
<b>DGO 1025CS</b>	10 x 17	25	CSI 06	500	G 3/8 F	26
<b>DGO 1320CS</b>	13 x 20	20	CSI 08	1000	G 1/2 M	27

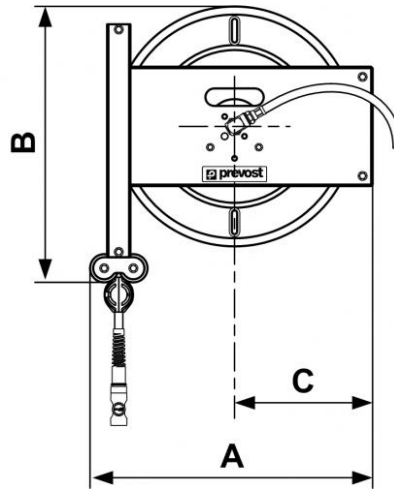

### Dimensions

Reference	A mm	B mm	C mm
<b>DGO 1025ES</b>	485	475	237
<b>DGO 1320ES</b>	485	475	237
<b>DGO 1610ES</b>	485	475	237
<b>DGO 1025IS</b>	485	475	237
<b>DGO 1320IS</b>	485	475	237
<b>DGO 1610IS</b>	485	475	237
<b>DGO 1025CS</b>	485	475	237
<b>DGO 1320CS</b>	485	475	237