


Tapered parallel male thread twin coupler



| | | | |
|---|---|---|---|
| <p><u>BSPT male thread</u> R 1/4</p> | <p><u>Technology</u> "One push" safety system (avoids hose whip)</p> | <p><u>Operating pressure</u> 2 to 12 bar</p> | <p><u>Flow rate at 6 bar</u> 833 l/min ($\Delta P = 0,6$ bar)</p> |
| <p><u>ID Passage</u> 6 mm</p> | <p><u>Temperature</u> -15°C to +70°C</p> | <p><u>Construction</u> Composite body</p> | <p><u>Highlight</u> Anti-static Non scratch</p> |

| Description | |
|-------------------|------------------|
| Reference | BSPT male thread |
| ISI 068151 | R 1/4 |
| ISI 068152 | R 3/8 |
| ISI 068153 | R 1/2 |

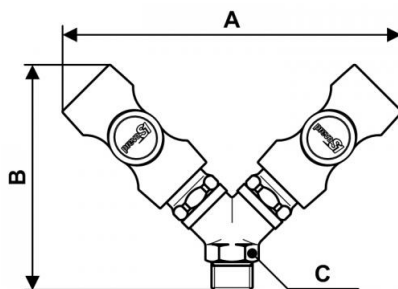

Dimensions

| Reference | A mm | B mm | C mm |
|-------------------|------|------|------|
| ISI 068151 | 134 | 88 | 17 |
| ISI 068152 | 140 | 92 | 20 |
| ISI 068153 | 150 | 104 | 25 |