


## Tapered parallel male thread twin coupler



<p><b><u>BSPT male thread</u></b> R 1/4</p>	<p><b><u>Technology</u></b> "One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b> 2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b> 833 l/min (<math>\Delta P = 0,6</math> bar)</p>
<p><b><u>ID Passage</u></b> 6 mm</p>	<p><b><u>Temperature</u></b> -15°C to +70°C</p>	<p><b><u>Construction</u></b> Composite body</p>	<p><b><u>Highlight</u></b> Anti-static Non scratch</p>

Description	
Reference	BSPT male thread
<b>ISI 068151</b>	R 1/4
<b>ISI 068152</b>	R 3/8
<b>ISI 068153</b>	R 1/2

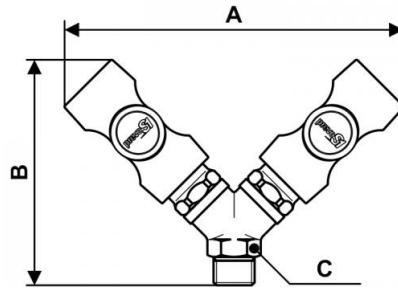

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 068151</b>	134	88	17
<b>ISI 068152</b>	140	92	20
<b>ISI 068153</b>	150	104	25