


## Tapered parallel male thread twin coupler



<p><b><u>BSPT male thread</u></b> R 3/8</p>	<p><b><u>Technology</u></b> "One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b> 2 to 12 bar</p>	<p><b><u>Flow rate at 6 bar</u></b> 2028 l/min (<math>\Delta P = 0,6</math> bar)</p>
<p><b><u>ID Passage</u></b> 8 mm</p>	<p><b><u>Temperature</u></b> -15°C to +70°C</p>	<p><b><u>Construction</u></b> Composite body</p>	<p><b><u>Highlight</u></b> Anti-static Non scratch</p>

Description	
Reference	BSPT male thread
<b>ISI 088152</b>	R 3/8
<b>ISI 088153</b>	R 1/2
<b>ISI 088154</b>	R 3/4

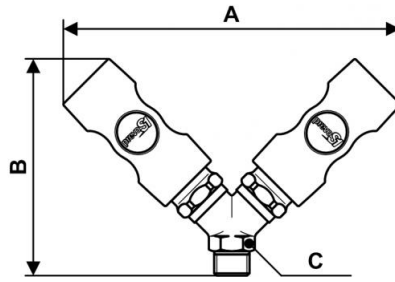

### Dimensions

Reference	A mm	B mm	C mm
<b>ISI 088152</b>	160	103	20
<b>ISI 088153</b>	167	112	25
<b>ISI 088154</b>	180	145	32