


Tapered parallel male thread twin coupler



<p><u>BSPT male thread</u> R 3/8</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u> 2028 l/min ($\Delta P = 0,6$ bar)</p>
<p><u>ID Passage</u> 8 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Composite body</p>	<p><u>Highlight</u> Anti-static Non scratch</p>

Description	
Reference	BSPT male thread
ISI 088152	R 3/8
ISI 088153	R 1/2
ISI 088154	R 3/4

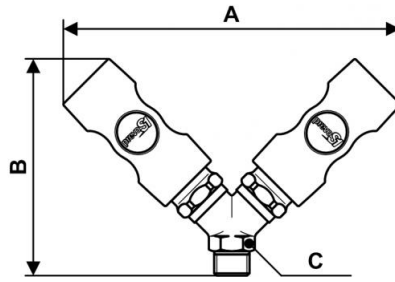

Dimensions

Reference	A mm	B mm	C mm
ISI 088152	160	103	20
ISI 088153	167	112	25
ISI 088154	180	145	32