


## CP series: 8-14 kg load capacity



<p><b><u>Length (cable (m))</u></b></p> <p>2.50</p>	<p><b><u>Min.Load (kg)</u></b></p> <p>8</p>	<p><b><u>Max.load (kg)</u></b></p> <p>10</p>	<p><b><u>Weight (kg)</u></b></p> <p>3.43</p>
<p><b><u>Temperature</u></b></p> <p>+5°C to +60°C</p>	<p><b><u>Construction</u></b></p> <p>Body : Aluminium Cable : Stainless steel</p>	<p><b><u>Applications</u></b></p> <p>Mounting Decks, Assembling, Packaging</p>	

Description				
Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
<b>BAL 80100CP</b>	2.50	8	10	3.43

Reference	Length (cable (m))	Min.Load (kg)	Max.load (kg)	Weight (kg)
<b>BAL 100120CP</b>	2.50	10	14	3.58

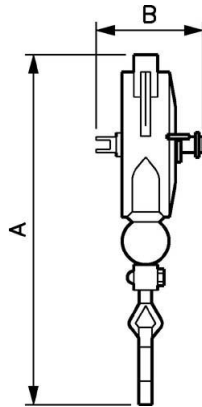

### Dimensions

Reference	A mm	B mm
<b>BAL 80100CP</b>	381	98
<b>BAL 100120CP</b>	381	98