


## ALTO 1 - Filter 25 - 5 and 0,01 µm



<p><b>BSPF female thread</b></p> <p>G 1/8</p>	<p><b>Flow rate (l/min at 6 bar ΔP : 0.3 bar)</b></p> <p>800</p>	<p><b>Max operating pressure (bar)</b></p> <p>12</p>	<p><b>Filtration (µm)</b></p> <p>25</p>
<p><b>Temperature</b></p> <p>+5°C to +50 °C</p>	<p><b>Construction</b></p> <p>Body : Aluminium</p> <p>Polycarbonate bowl with metallic protection</p>	<p><b>Equipped with</b></p> <p>Manual drain</p>	

Description				
Reference	BSPF female thread	Flow rate (l/min at 6 bar &#916;P : 0.3 bar)	Max operating pressure (bar)	Filtration (µm)
<b>TF 0</b>	G 1/8	800	12	25

Reference	BSPP female thread	Flow rate (l/min at 6 bar &#916;P : 0.3 bar)	Max operating pressure (bar)	Filtration ( $\mu$ m)
<b>TF 1</b>	G 1/4	800	12	25
<b>TF 105</b>	G 1/4	800	12	5
<b>TC 1</b>	G 1/4	250	12	0.01

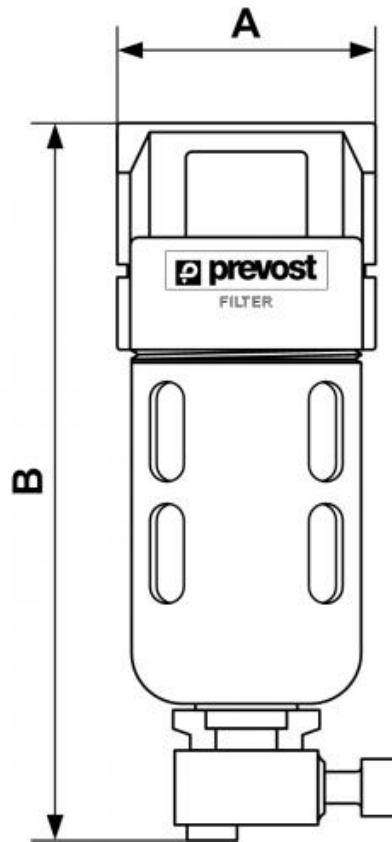

### Dimensions

Reference	A mm	B mm
<b>TF 0</b>	40	113
<b>TF 1</b>	40	113
<b>TF 105</b>	40	113
<b>TC 1</b>	40	113