

ALTO 1 - Filter 25 - 5 and 0,01 µm



BSPF female thread

G 1/8

Flow rate (l/min at 6 bar ΔP : 0.3 bar)

800

Max operating pressure (bar)

12

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction

Body : Aluminium
Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

| Reference | BSPF female thread | Flow rate (l/min at 6 bar ΔP : 0.3 bar) | Max operating pressure (bar) | Filtration (µm) |
|-------------|--------------------|--|------------------------------|-----------------|
| TF 0 | G 1/8 | 800 | 12 | 25 |

| Reference | BSPP female thread | Flow rate (l/min at 6 bar ΔP : 0.3 bar) | Max operating pressure (bar) | Filtration (μ m) |
|---------------|--------------------|--|------------------------------|-----------------------|
| TF 1 | G 1/4 | 800 | 12 | 25 |
| TF 105 | G 1/4 | 800 | 12 | 5 |
| TC 1 | G 1/4 | 250 | 12 | 0.01 |

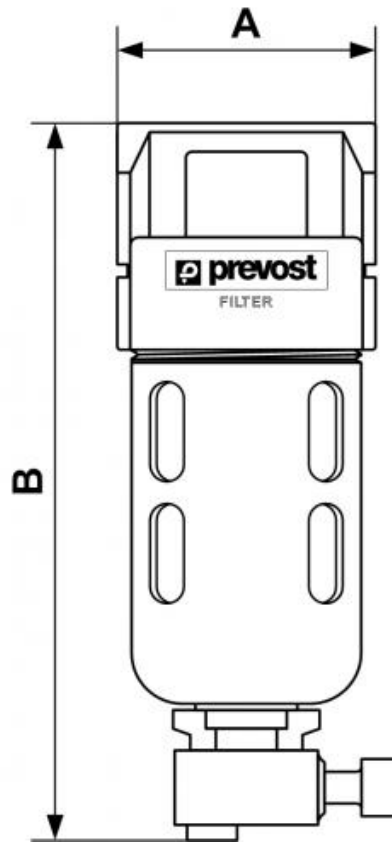

Dimensions

| Reference | A mm | B mm |
|---------------|------|------|
| TF 0 | 40 | 113 |
| TF 1 | 40 | 113 |
| TF 105 | 40 | 113 |
| TC 1 | 40 | 113 |