


ALTO 1 - Filter 25 - 5 and 0,01 µm



<p>BSPF female thread</p> <p>G 1/8</p>	<p>Flow rate (l/min at 6 bar ΔP : 0.3 bar)</p> <p>800</p>	<p>Max operating pressure (bar)</p> <p>12</p>	<p>Filtration (µm)</p> <p>25</p>
<p>Temperature</p> <p>+5°C to +50 °C</p>	<p>Construction</p> <p>Body : Aluminium</p> <p>Polycarbonate bowl with metallic protection</p>	<p>Equipped with</p> <p>Manual drain</p>	

Description				
Reference	BSPF female thread	Flow rate (l/min at 6 bar ΔP : 0.3 bar)	Max operating pressure (bar)	Filtration (µm)
TF 0	G 1/8	800	12	25

Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0.3 bar)	Max operating pressure (bar)	Filtration (μ m)
TF 1	G 1/4	800	12	25
TF 105	G 1/4	800	12	5
TC 1	G 1/4	250	12	0.01

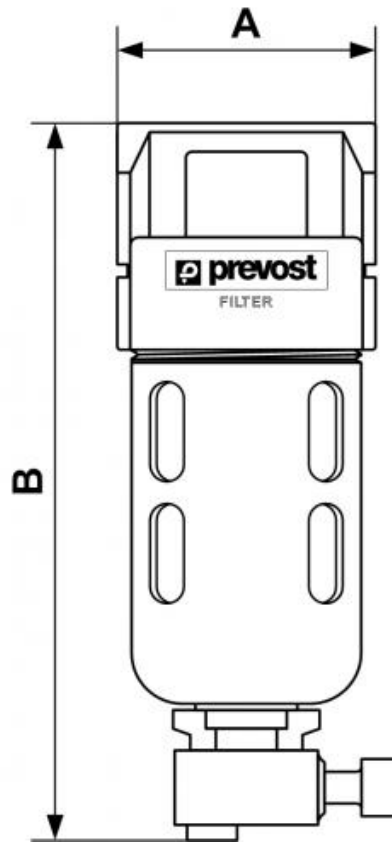

Dimensions

Reference	A mm	B mm
TF 0	40	113
TF 1	40	113
TF 105	40	113
TC 1	40	113