

## ALTO 1 - Filter 25 - 5 and 0,01 µm



**BSPF female thread**

G 1/8

**Flow rate (l/min at 6 bar ΔP : 0.3 bar)**

800

**Max operating pressure (bar)**

12

**Filtration (µm)**

25

**Temperature**

+5°C to +50 °C

**Construction**

Body : Aluminium  
Polycarbonate bowl with metallic protection


**Equipped with**

Manual drain

### Description

Reference	BSPF female thread	Flow rate (l/min at 6 bar &#916;P : 0.3 bar)	Max operating pressure (bar)	Filtration (µm)
<b>TF 0</b>	G 1/8	800	12	25

Reference	BSPP female thread	Flow rate (l/min at 6 bar &#916;P : 0.3 bar)	Max operating pressure (bar)	Filtration ( $\mu$ m)
<b>TF 1</b>	G 1/4	800	12	25
<b>TF 105</b>	G 1/4	800	12	5
<b>TC 1</b>	G 1/4	250	12	0.01

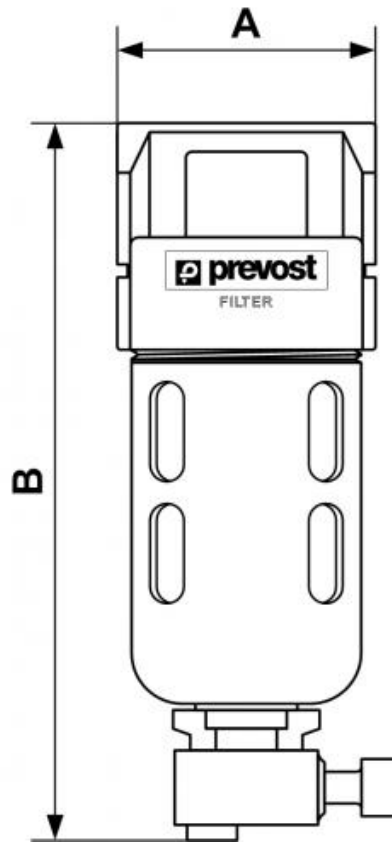

### Dimensions

Reference	A mm	B mm
<b>TF 0</b>	40	113
<b>TF 1</b>	40	113
<b>TF 105</b>	40	113
<b>TC 1</b>	40	113