

ALTO 1 - Lubricator



BSSP female thread

G 1/8

Flow rate (l/min at 6 bar ΔP : 0.5 bar)

1350

Max operating pressure (bar)

12

Temperature

+5°C to +50 °C

Construction

Body : Aluminium

Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

Reference	BSSP female thread	Flow rate (l/min at 6 bar ΔP : 0.5 bar)	Max operating pressure (bar)
TL 0	G 1/8	1350	12

Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0.5 bar)	Max operating pressure (bar)
TL 1	G 1/4	1350	12

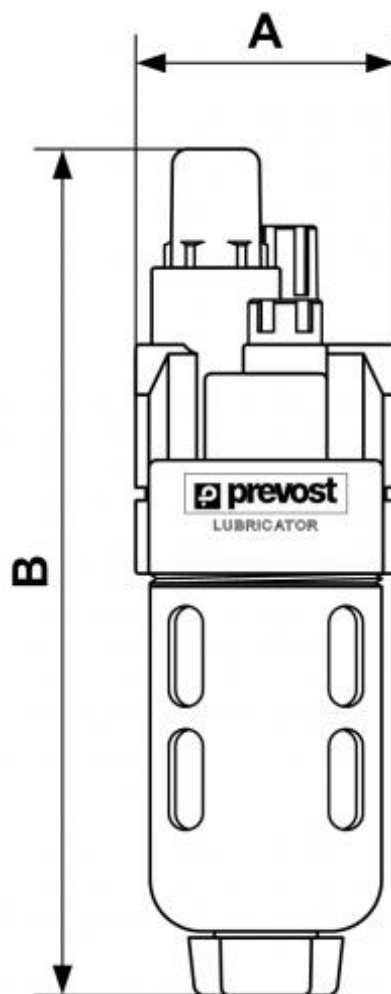

Dimensions

Reference	A mm	B mm
TL 0	40	135
TL 1	40	135