

ALTO 1 - Filter-regulator



BSPF female thread

G 1/8

Flow rate (l/min at 7 bar ΔP : 1bar)

550

Operating pressure (bar)

Inlet: 12 Outlet: 0.5-10

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction

Body : Aluminium
Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

Reference	BSPF female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)	Filtration (µm)
TM 0	G 1/8	550	Inlet: 12 Outlet: 0.5-10	25

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)	Filtration (μ m)
TM 1	G 1/4	550	Inlet: 12 Outlet: 0.5-10	25
TM 105	G 1/4	550	Inlet: 12 Outlet: 0.5-10	5

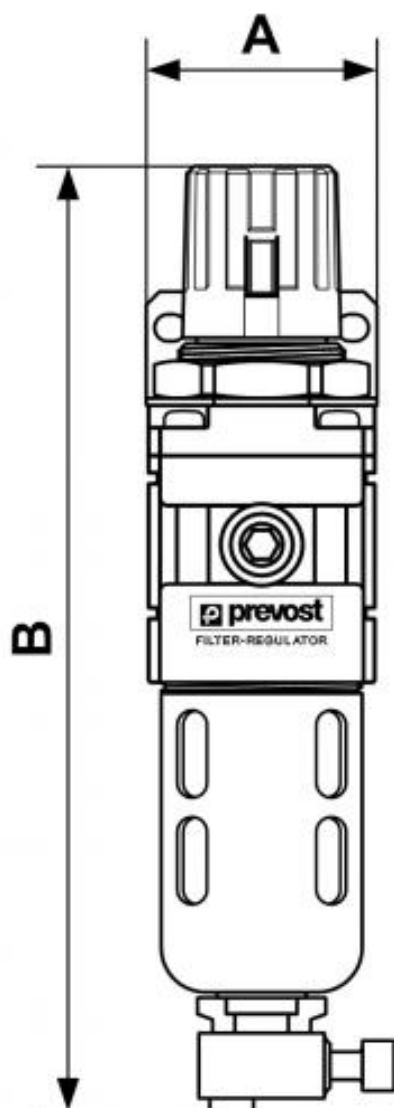

Dimensions

Reference	A mm	B mm
TM 0	40	170
TM 1	40	170
TM 105	40	170