

ALTO 1 - Regulator



BSPP female thread

G 1/8

Flow rate (l/min at 7 bar ΔP

1bar) = 600

Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

Temperature

+5°C to +50 °C

Construction

Body : Aluminium

Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP	Operating pressure (bar)	Flow rate (l/min at 7 bar ΔP ; P : 1bar)
TR 0	G 1/8	1bar) = 600	Inlet: 15 Outlet: 0.5-10	600
TR 1	G 1/4		Inlet: 15 Outlet: 0.5-10	600

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Operating pressure (bar)	Flow rate (l/min at 7 bar ΔP ; P : 1 bar)
TR B21	G 1/4		Inlet: 15 Outlet: 0.2-2	600
TR B41	G 1/4		Inlet: 15 Outlet: 0.2-4	

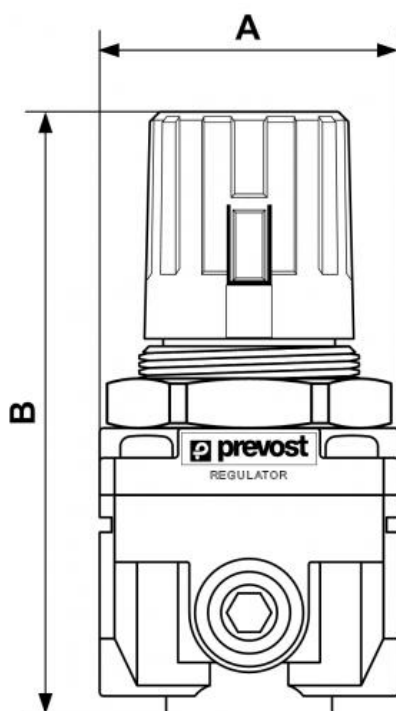

Dimensions

Reference	A mm	B mm
TR 0	40	81
TR 1	40	81
TR B21	40	81
TR B41	40	81