


ALTO 3 - Submicronic filter set with regulator and gauge and prevoS1 quick release quick coupler



<p><u>BSPP female thread</u> G 1/2</p>	<p><u>Flow rate (l/min at 7 bar ΔP : 1bmax in l/min)</u> 833</p>	<p><u>Max operating pressure (bar)</u> 12</p>	<p><u>Filtration (μm)</u> 5 and 0.01</p>
<p><u>Equipped with 1 coupling</u> ISI 06</p>	<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>

Description					
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bmax in l/min)	Max operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling

KTB CSM3BS	G 1/2	750	12	5 and 0.01	BSI 06
KTB CSM3ES	G 1/2	1500	12	5 and 0.01	ESI 07
KTB CSM3IS	G 1/2	833	12	5 and 0.01	ISI 06

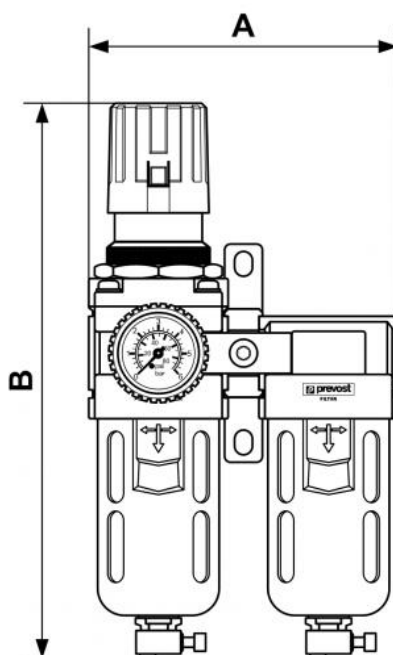

Dimensions

Reference	A mm	B mm
KTB CSM3BS	156	280
KTB CSM3ES	6.142	11.024
KTB CSM3IS	6.142	11.024