


thread swivel coupler



<p><u>BSPP female thread</u> G 3/8</p>	<p><u>Profile</u> British</p>	<p><u>Technology</u> "One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u> 2 to 12 bar</p>
<p><u>Flow rate at 6 bar</u> 750 l/min ($\Delta P = 0,6$ bar)</p>	<p><u>ID Passage</u> 6 mm</p>	<p><u>Temperature</u> -15°C to +70°C</p>	<p><u>Construction</u> Composite body</p>
<p><u>Highlight</u> Anti-static Non scratch</p>			

Description	
Reference	BSPP female thread
BSI 061102SW	G 3/8

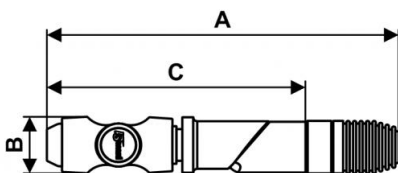

Dimensions

Reference	A mm	B mm	C mm
BSI 061102SW	180	30	132.9