


## Hose tail coupler



<p><b><u>For hose ID (mm)</u></b></p> <p>6</p>	<p><b><u>Profile</u></b></p> <p>British</p>	<p><b><u>Technology</u></b></p> <p>"One push" safety system (avoids hose whip)</p>	<p><b><u>Operating pressure</u></b></p> <p>2 to 12 bar</p>
<p><b><u>Flow rate at 6 bar</u></b></p> <p>750 l/min (<math>\Delta P = 0,6</math> bar)</p>	<p><b><u>ID Passage</u></b></p> <p>6 mm</p>	<p><b><u>Temperature</u></b></p> <p>-15°C to +70°C</p>	<p><b><u>Construction</u></b></p> <p>Composite body</p>
<p><b><u>Highlight</u></b></p> <p>Anti-static Non scratch</p>			

Description	
Reference	For hose ID (mm)
<b>BSI 061806</b>	6
<b>BSI 061808</b>	8
<b>BSI 061810</b>	10

Reference	For hose ID (mm)
<b>BSI 061813</b>	13

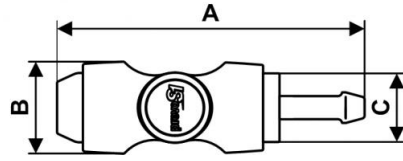

### Dimensions

Reference	A mm	B mm	C mm
<b>BSI 061806</b>	90.6	30	19.4
<b>BSI 061808</b>	90.6	30	19.4
<b>BSI 061810</b>	90.6	30	19.4
<b>BSI 061813</b>	95.6	30	19.4