


Hose tail coupler



<p><u>For hose ID (mm)</u></p> <p>6</p>	<p><u>Technology</u></p> <p>"One push" safety system (avoids hose whip)</p>	<p><u>Operating pressure</u></p> <p>2 to 12 bar</p>	<p><u>Flow rate at 6 bar</u></p> <p>800 l/min ($\Delta P = 0,6$ bar)</p>
<p><u>ID Passage</u></p> <p>6 mm</p>	<p><u>Temperature</u></p> <p>-15°C to +70°C</p>	<p><u>Construction</u></p> <p>Composite body</p>	<p><u>Highlight</u></p> <p>Anti-static Non scratch</p>

Description	
Reference	For hose ID (mm)
ASI 061806	6
ASI 061808	8
ASI 061810	10
ASI 061813	13

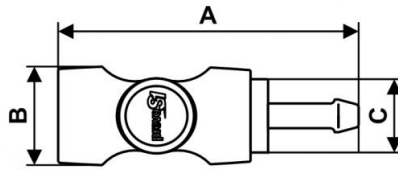

Dimensions

Reference	A mm	B mm	C mm
ASI 061806	83	30	19.4
ASI 061808	83	30	19.4
ASI 061810	83	30	19.4
ASI 061813	88	30	19.4