


## MFC activated carbon filtration



<p><b>Female thread (BSPP)</b> G 1/4</p>	<p><b>Flow rate (in m<sup>3</sup>/h at 7 bar)</b> 34</p>	<p><b>Replacement filter cartridge</b> MFCC 301</p>	<p><b>Max operating pressure</b> 16 bar 16 bar, 11 bar for G 1 1/2 to G3</p>
<p><b>Temperature</b> +1°C to +66°C</p>	<p><b>Construction</b> Aluminium body and bowl</p>	<p><b>Filtration</b> Activated carbon filter</p>	

Description			
Reference	Female thread (BSPP)	Flow rate (in m <sup>3</sup> /h at 7 bar)	Replacement filter cartridge
<b>MFC 301</b>	G 1/4	34	MFCC 301
<b>MFC 302</b>	G 3/8	59	MFCC 302

Reference	Female thread (BSPP)	Flow rate (in m <sup>3</sup> /h at 7 bar)	Replacement filter cartridge
<b>MFC 303</b>	G 1/2	85	MFCC 303
<b>MFC 304</b>	G 3/4	127	MFCC 304
<b>MFC 305</b>	G 3/4	175	MFCC 305
<b>MFC 306</b>	G 1	267	MFCC 306
<b>MFC 307</b>	G 1 1/2	437	MFCC 307
<b>MFC 308</b>	G 1 1/2	612	MFCC 308
<b>MFC 309</b>	G 2	681	MFCC 309
<b>MFC 310</b>	G 2 1/2	993	MFCC 310
<b>MFC 311</b>	G 2 1/2	1317	MFCC 311
<b>MFC 312</b>	G 2 1/2	1750	MFCC 312
<b>MFC 313</b>	G 3	2039	MFCC 313
<b>MFC 314</b>	G 3	2549	MFCC 314

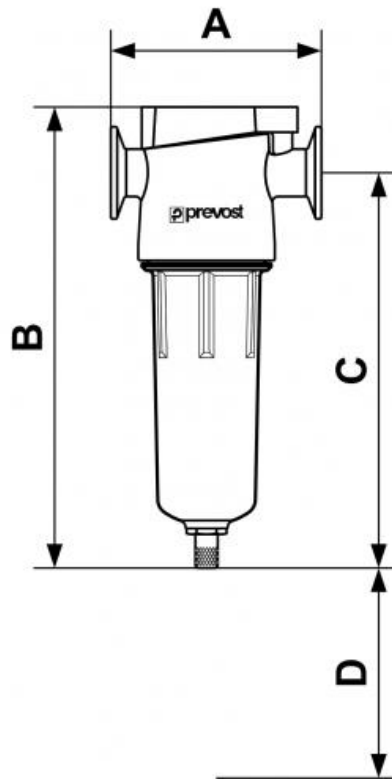

### Dimensions

Reference	A mm	B mm	C mm	D mm
<b>MFC 301</b>	113.6	205.5	171.4	76
<b>MFC 302</b>	113.6	205.5	171.4	76
<b>MFC 303</b>	113.6	252	216.4	76
<b>MFC 304</b>	132	262.1	219.8	76
<b>MFC 305</b>	132	262.1	219.8	76
<b>MFC 306</b>	132	326.1	238.8	76
<b>MFC 307</b>	200	336.7	276.1	76
<b>MFC 308</b>	200	433.7	373.1	76
<b>MFC 309</b>	200	566	505.4	76
<b>MFC 310</b>	230.8	634.4	550	76

Reference	A mm	B mm	C mm	D mm
<b>MFC 311</b>	230.8	634.4	550	76
<b>MFC 312</b>	230.8	634.4	550	76
<b>MFC 313</b>	230.8	817.1	732.7	76
<b>MFC 314</b>	230.8	1085.1	1000.7	76